


Carpet

Construction

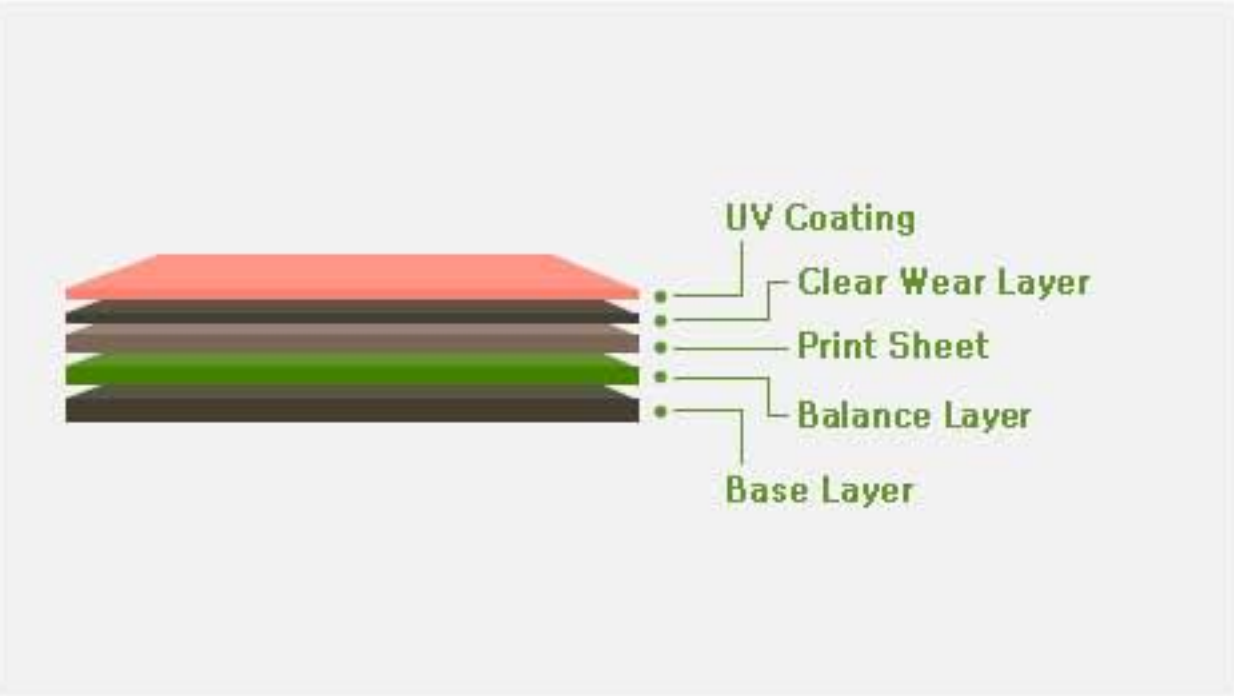

Test report

Heat Stability	0.3mm/0.01" (80℃+2℃, 6hr/1hr)
Abraison resistance	0.1% Loss
Slip resistance	Exceeds ADA Requirement
Static Coefficient of Friction	Dry : 0.72 (> 0.50)
	Wet : 0.67 (> 0.50)
Residual indentation	≤0.10mm
Color fastness	≥6
Dimensional stability	≤0.25%
Flexibility	No crack was found
Electrick behavior	Pass

Dimension & Packing

- Dimensions : 3,0 x 470 x 470(mm)
- Packing : 15pcs/Box

Usage

Home, School, Bank, Market, Public office, Hospital, Cafe, etc.

Feature

- Anti-water & wet
Wine spills, water cleaning is not a problem.
- Crack-proof
Strong to falling shock of sharp edge. Resilient LVT restores its surface.
- Floor heating
High thermal conduction. PVC tile saves you 50% of house warming costs comparing wooden floor.
- Various designs
World-class designer's 60 legendary patterns will surely satisfying your desire for sensuous space.

